

105260" 4559660

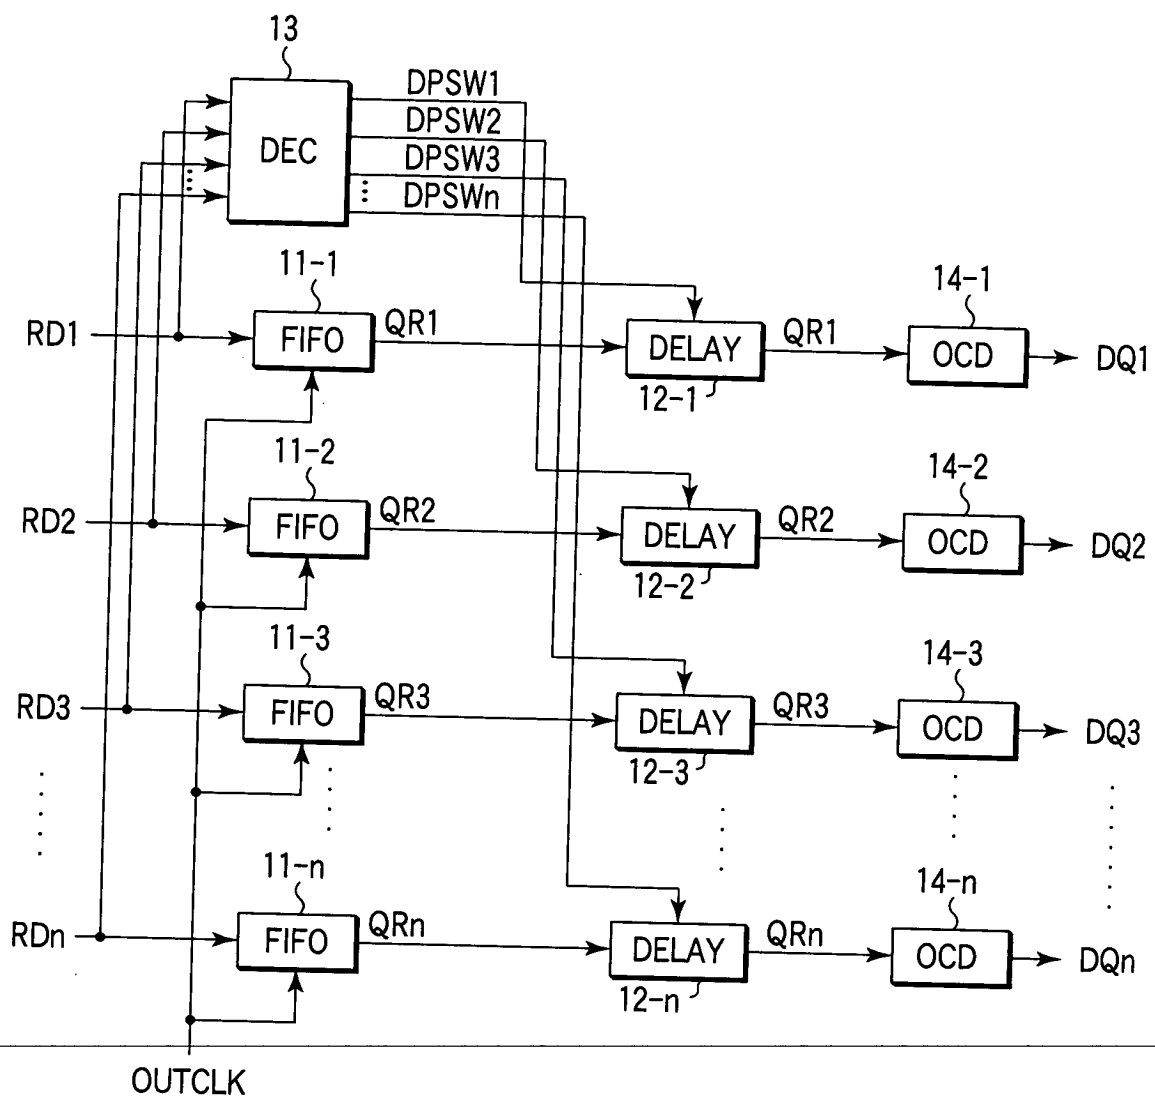


FIG. 1

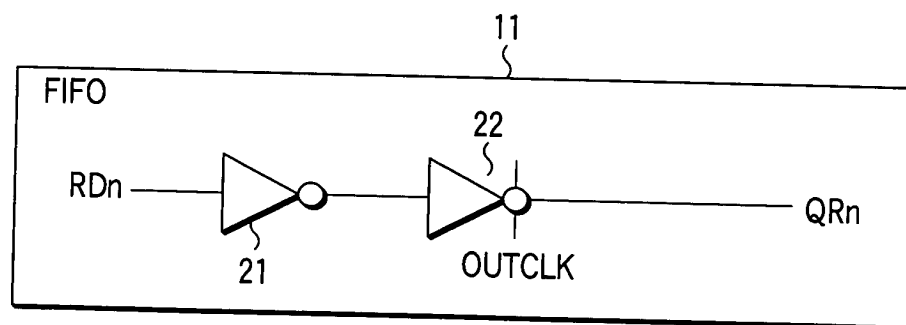


FIG. 2

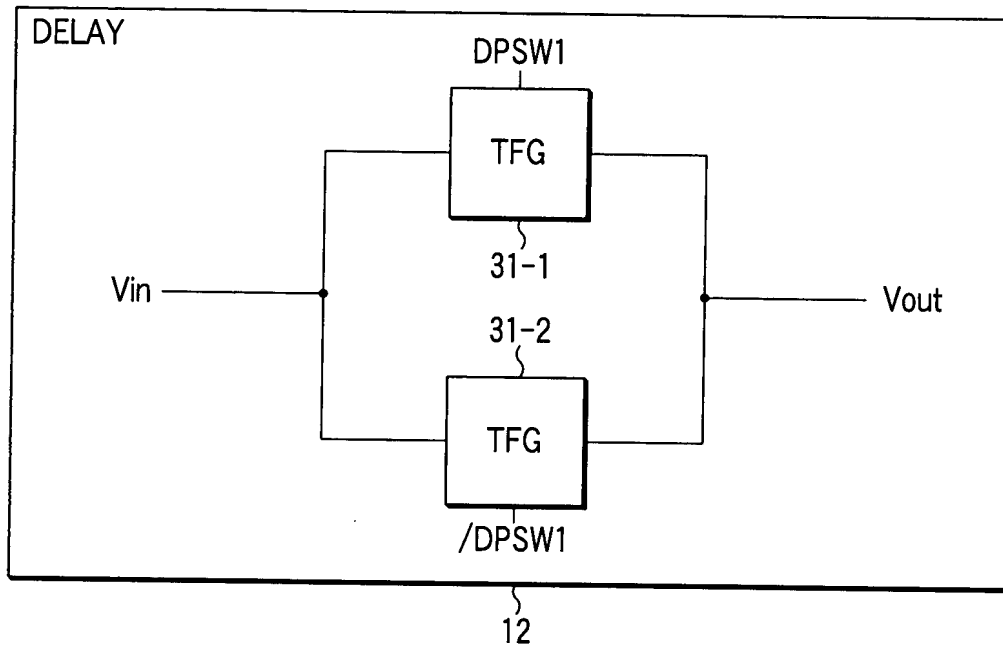


FIG. 3

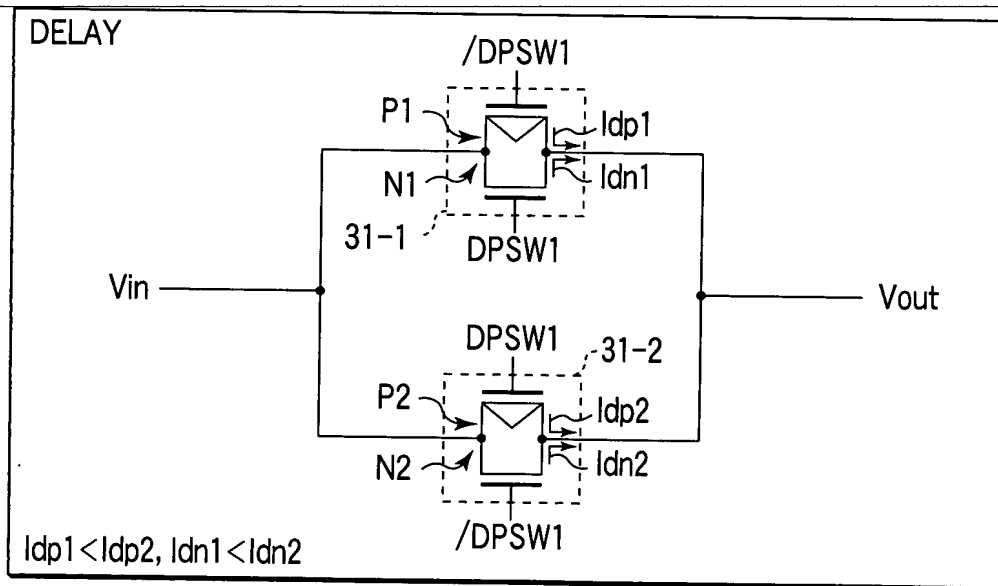


FIG. 4

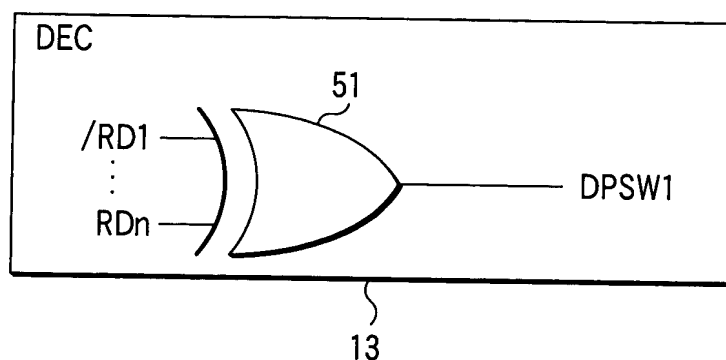


FIG. 5

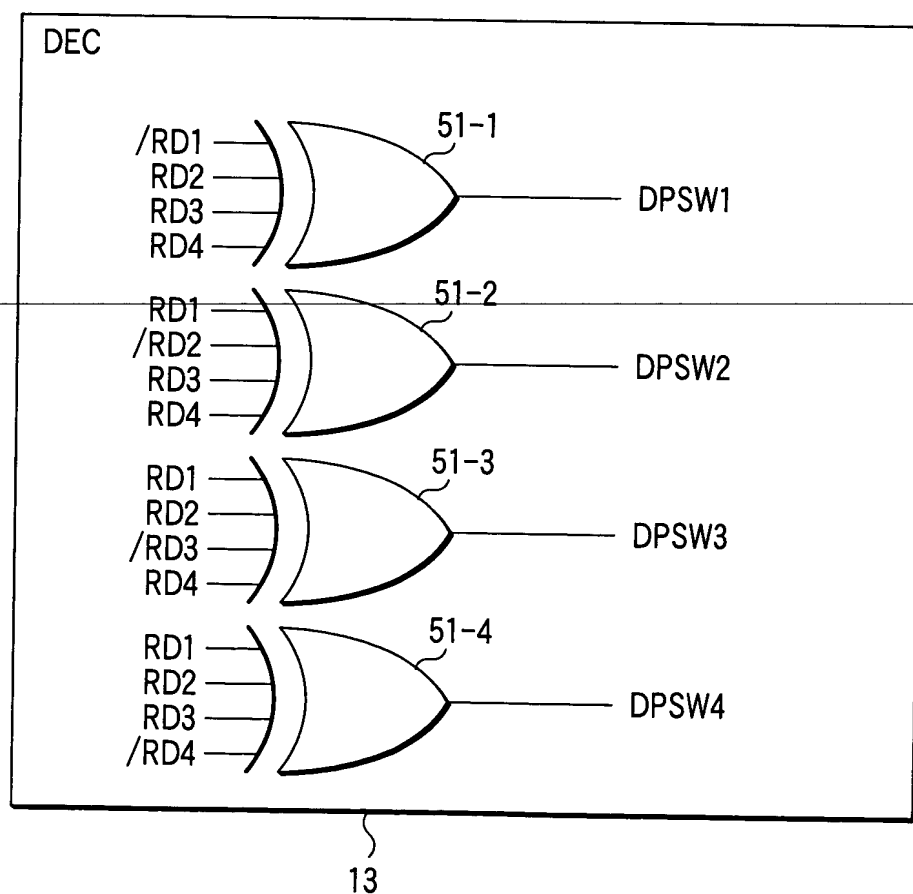


FIG. 6

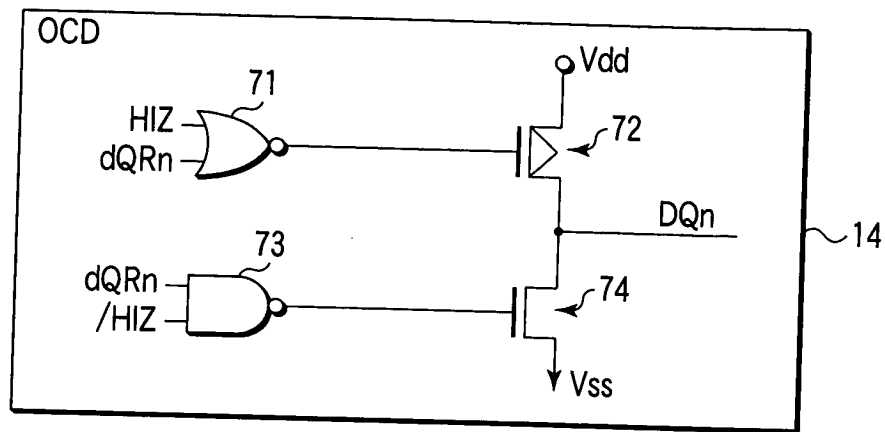


FIG. 7

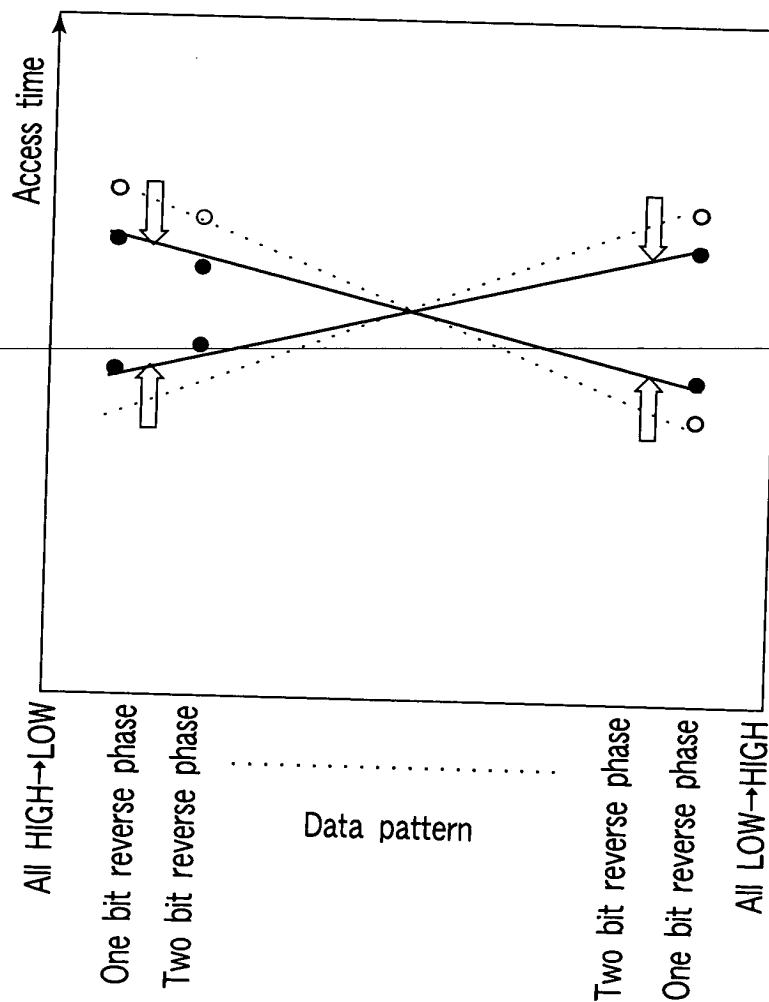


FIG. 8

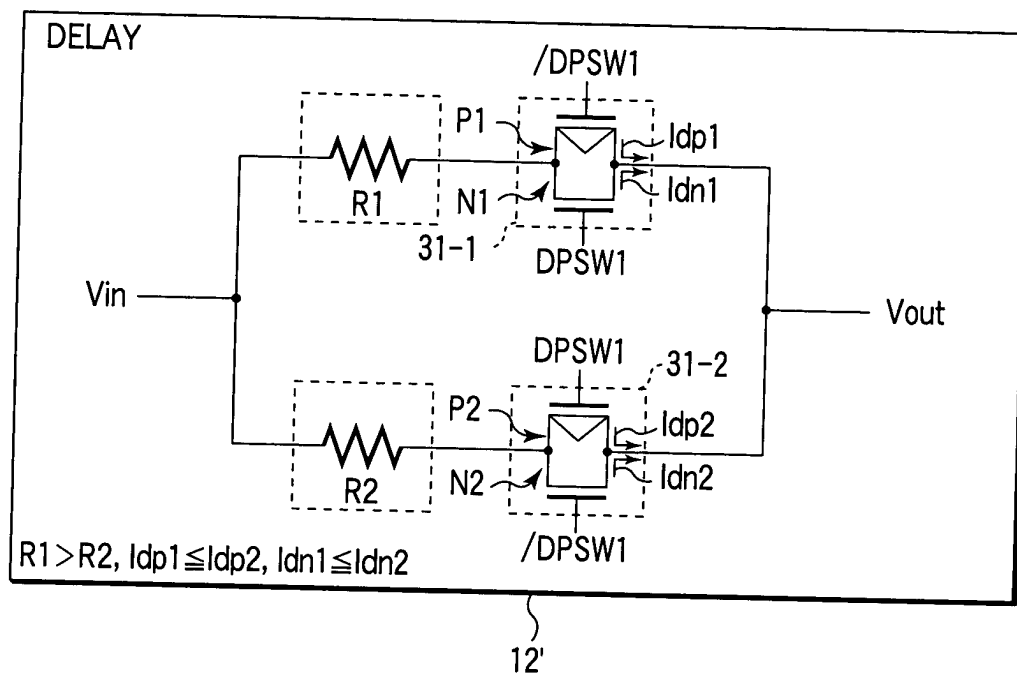


FIG. 9

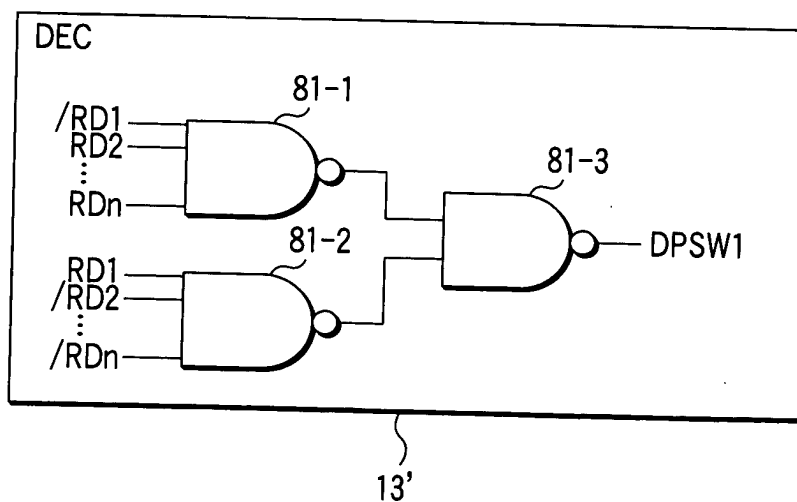


FIG. 10

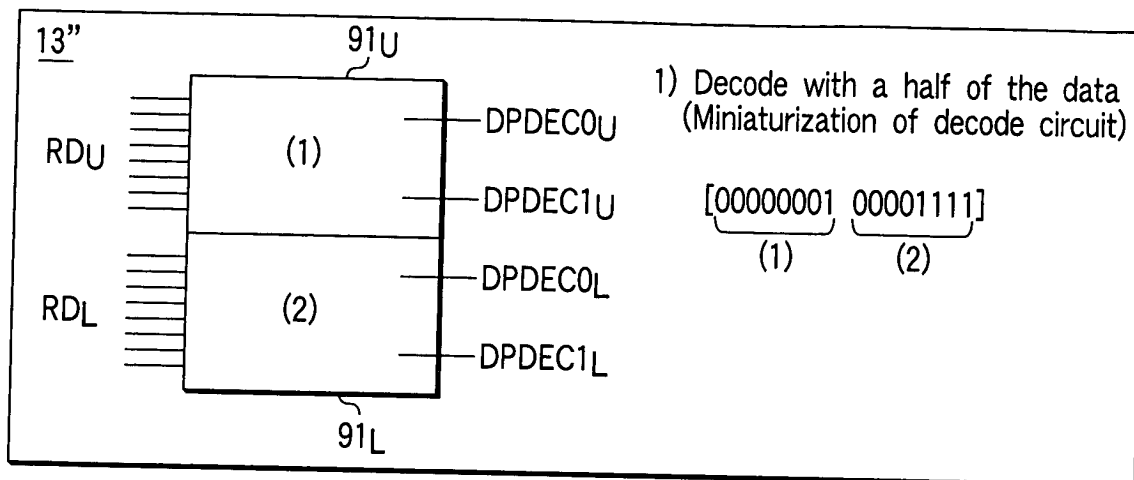


FIG. 11A

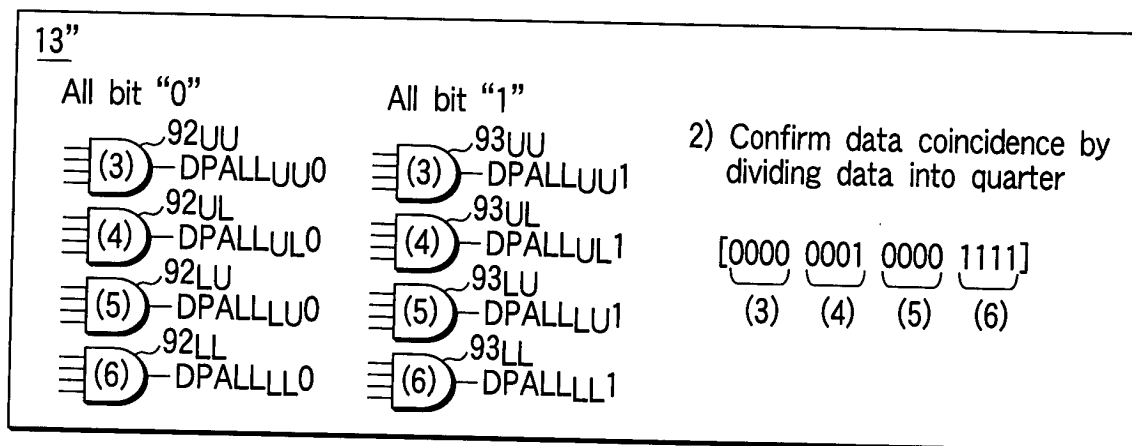


FIG. 11B

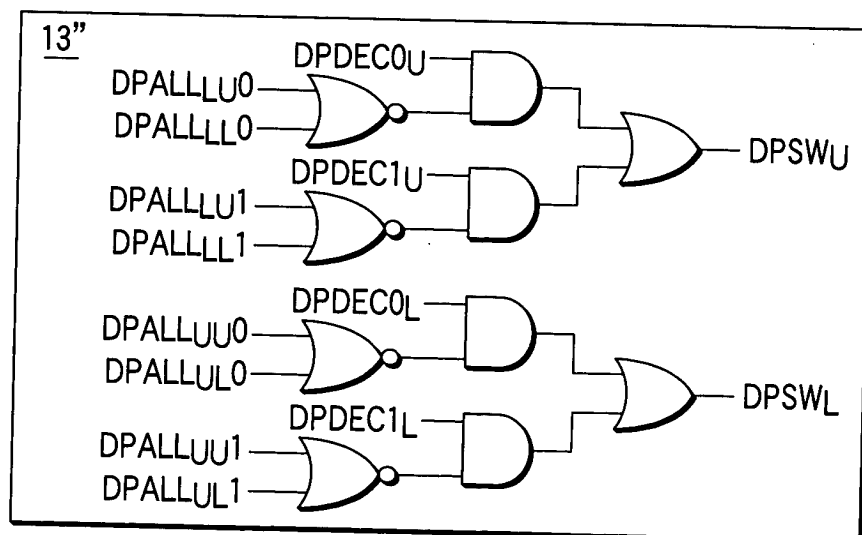


FIG. 11C

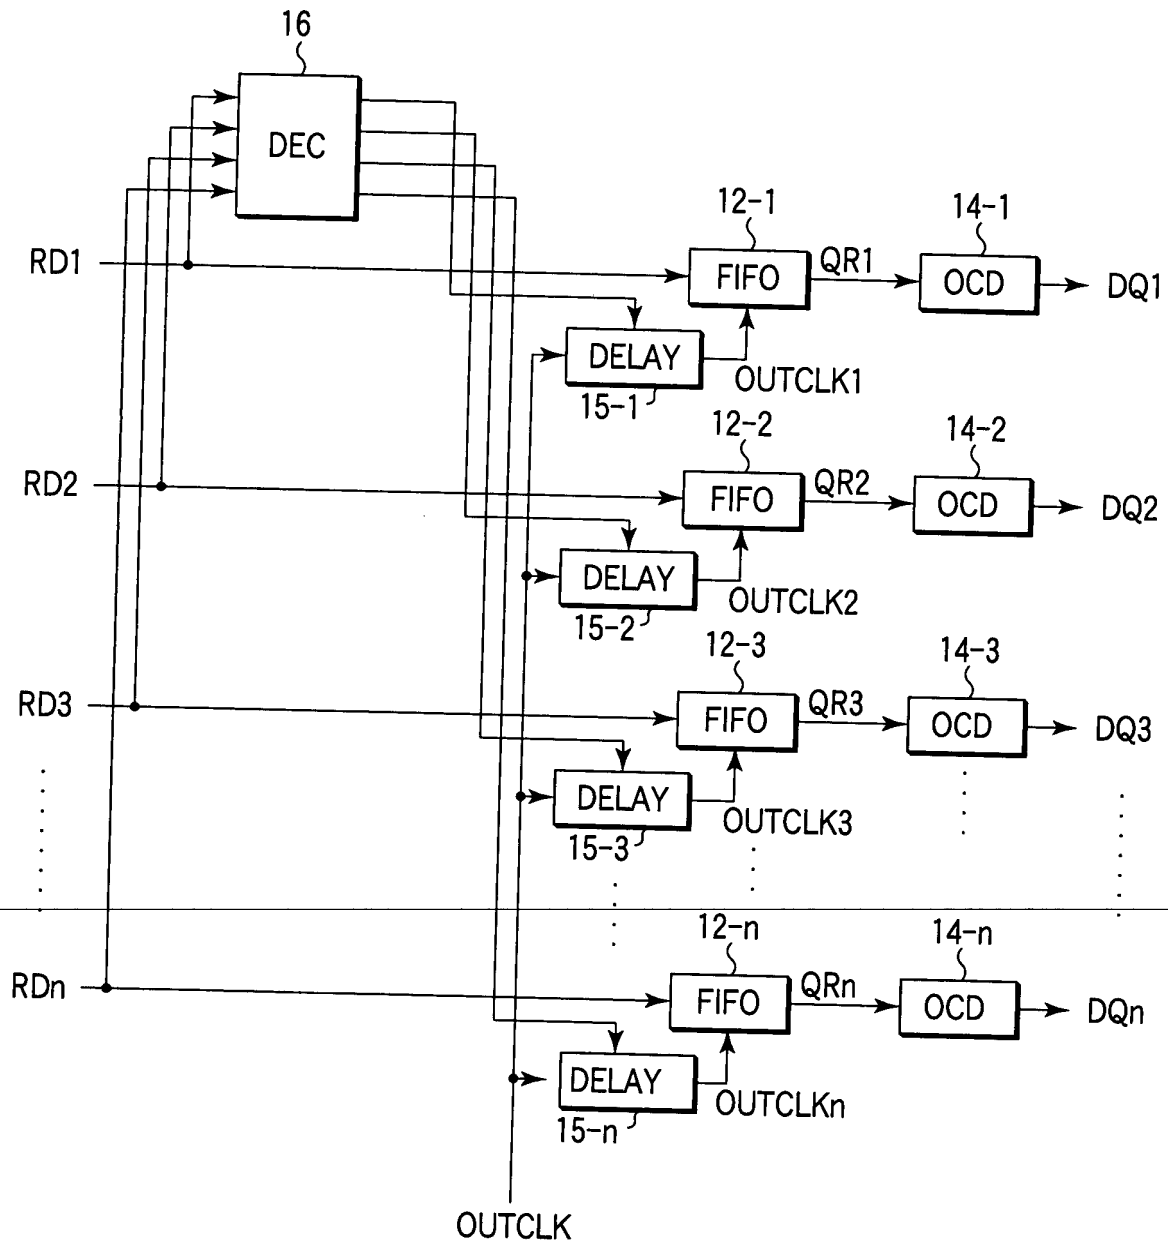


FIG. 12

096534-09501
T05260-4E559660

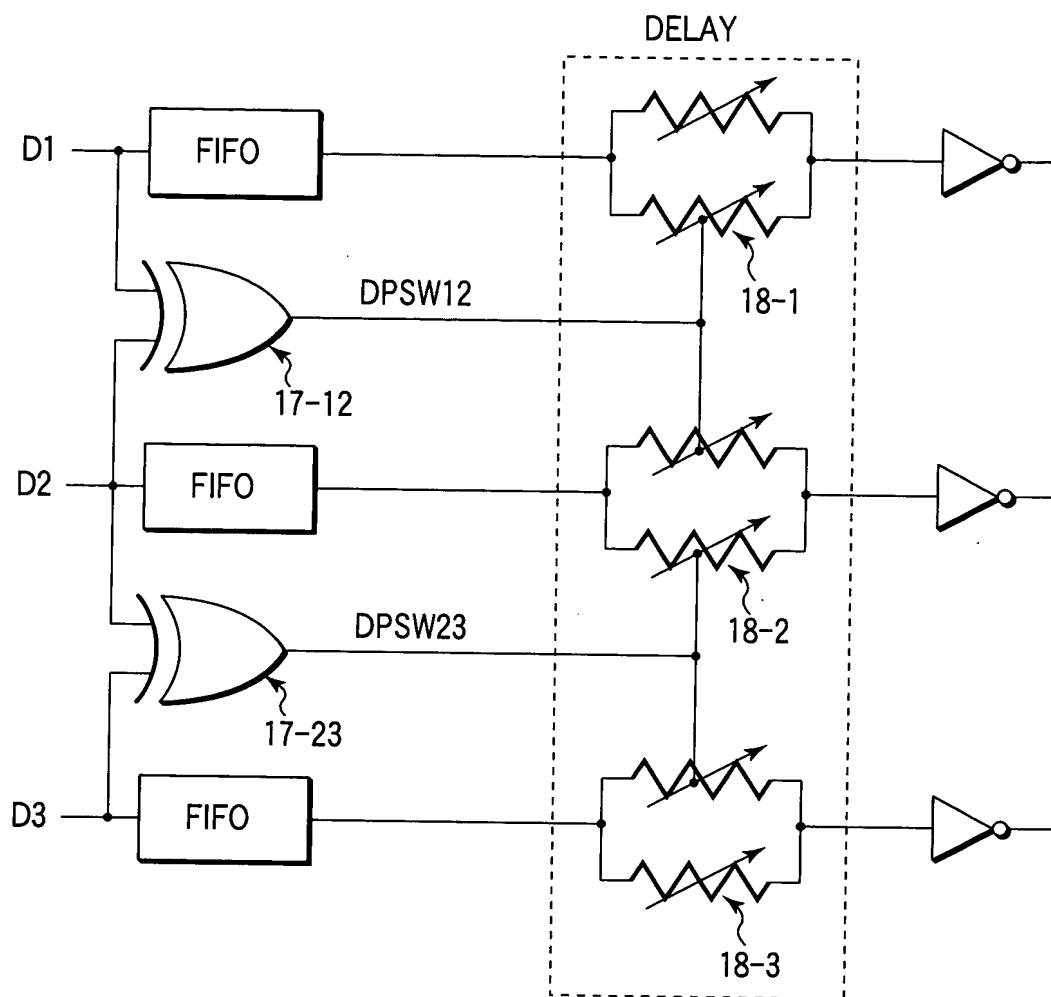


FIG. 13

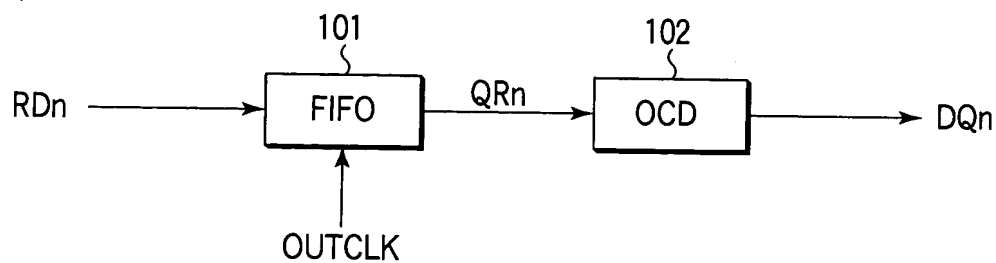


FIG. 14 PRIOR ART

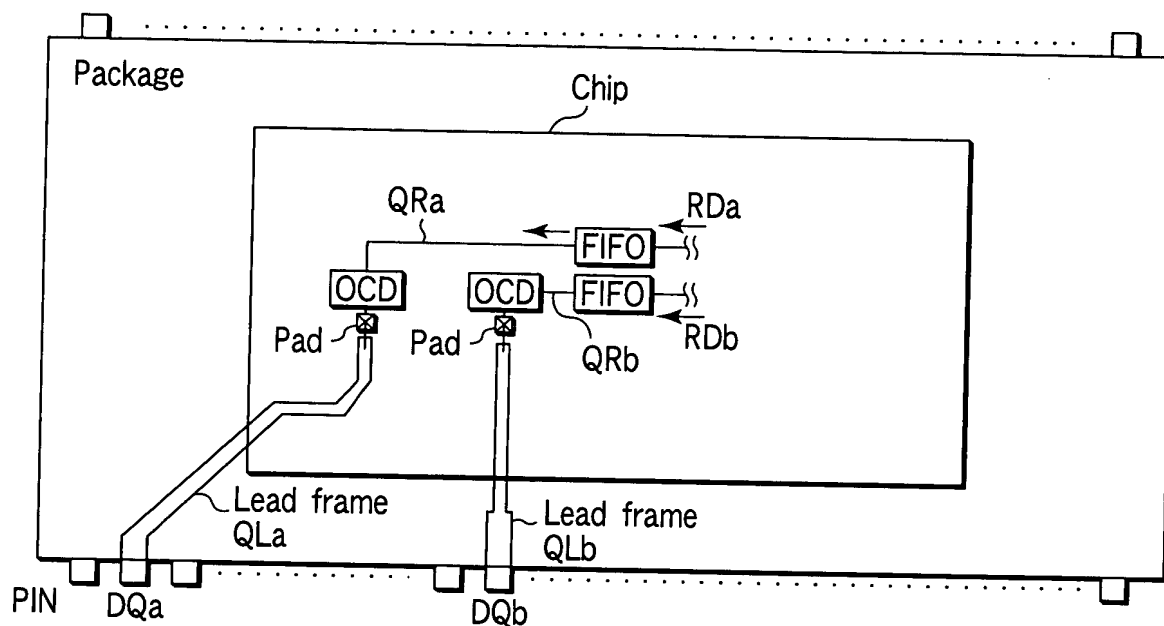


FIG. 15A PRIOR ART

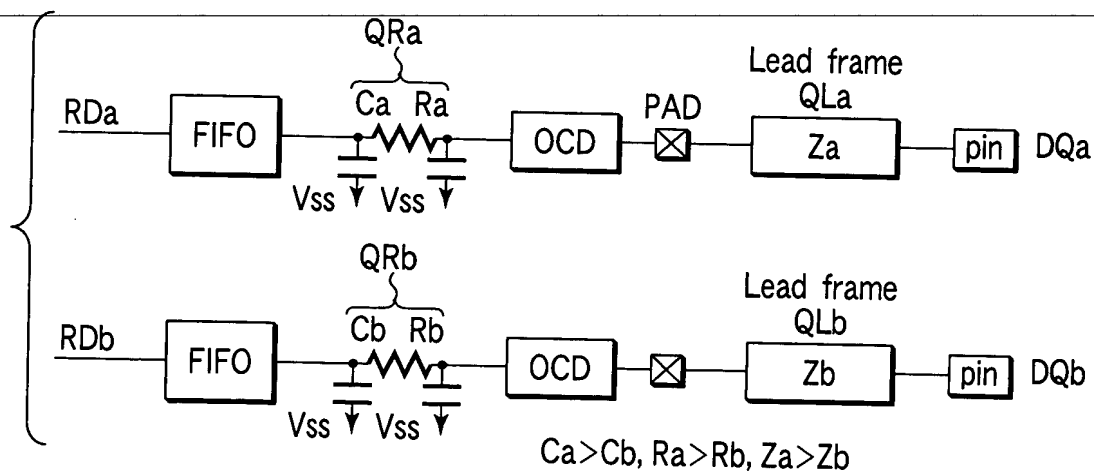


FIG. 15B PRIOR ART

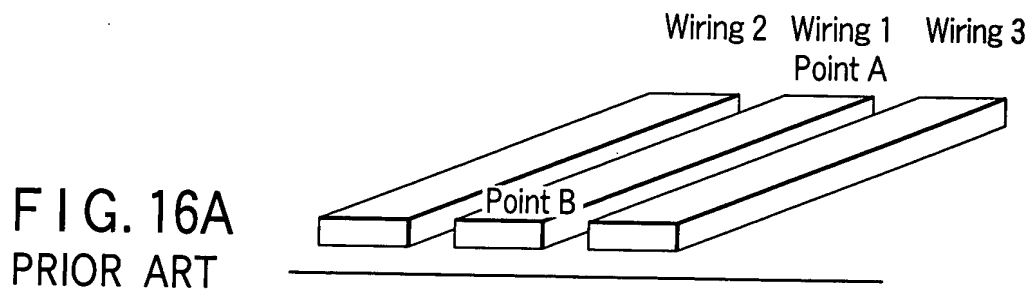


FIG. 16B
PRIOR ART


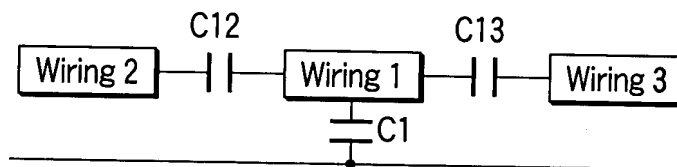


FIG. 16C
PRIOR ART

	Wiring 2	Wiring 1	Wiring 3	Data pattern
Potential change				In-phase
				Reverse phase
				In-phase
				Reverse phase

FIG. 16D
PRIOR ART

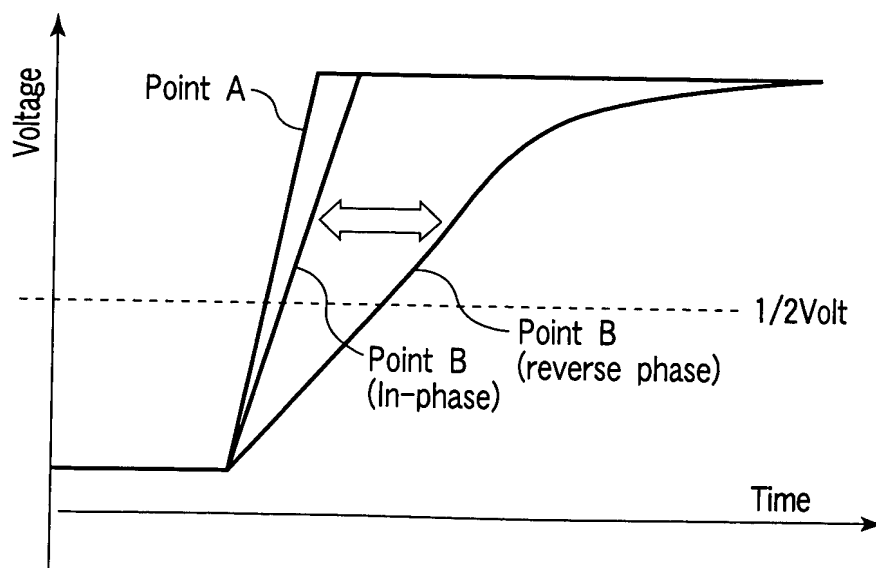

Potential change (ΔV) by the transient current which flows the power source GND

$$\Delta V = N \cdot L_{\text{eff}} \cdot (di/dt)$$

Effective inductance (L_{eff}) of PKG (power source)

Current drive performance (di/dt) of the driver

Simultaneous switching number (N)

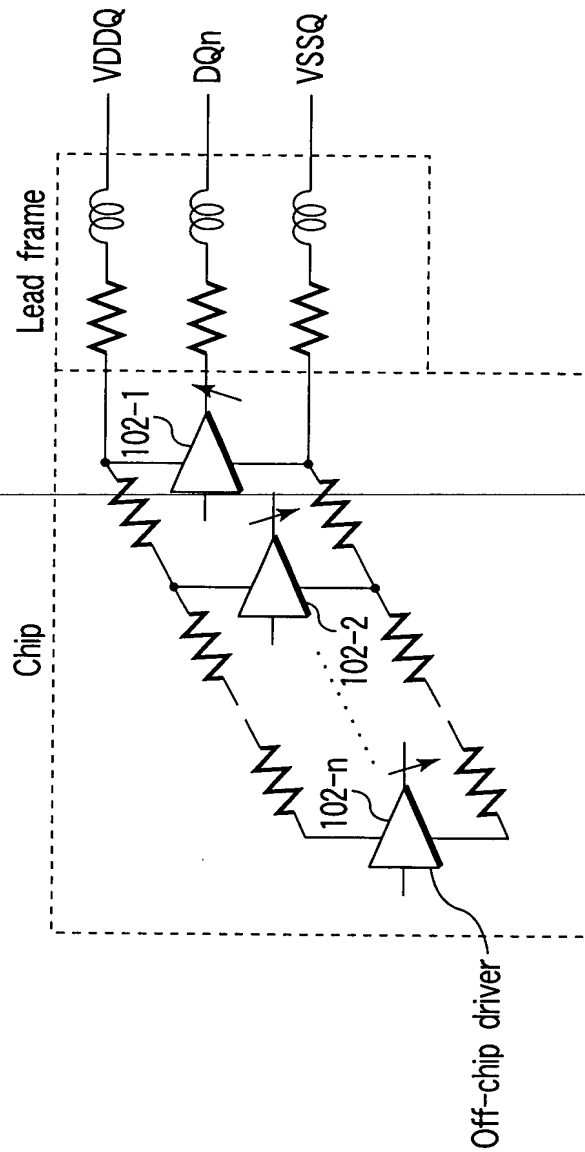


FIG. 17 PRIOR ART

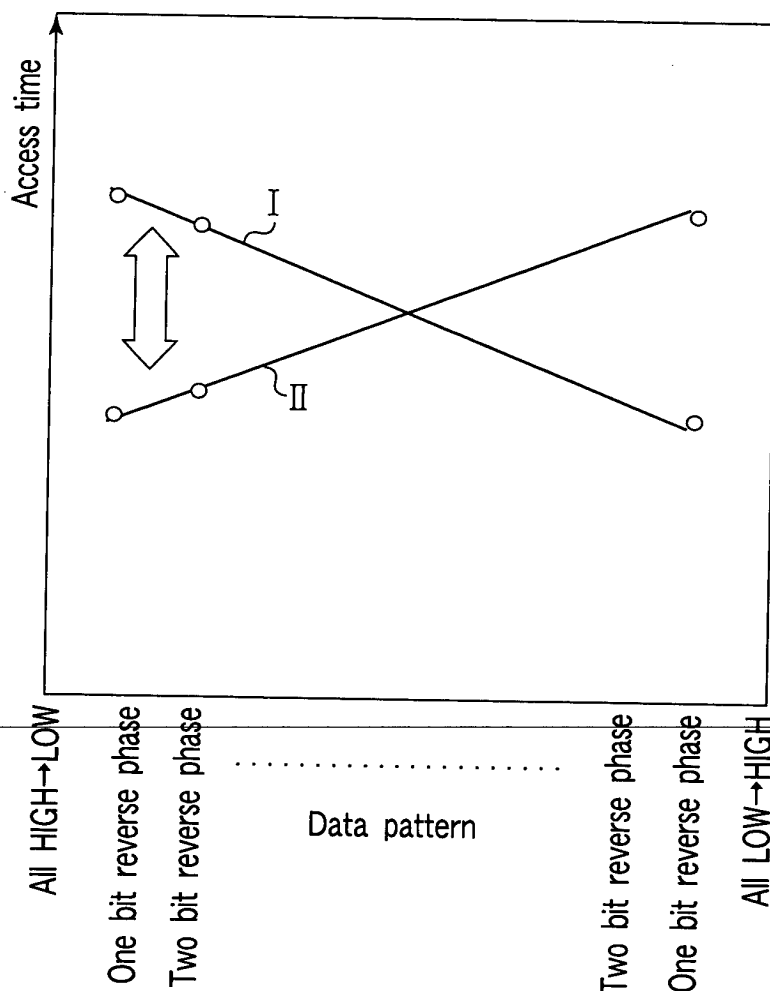


FIG. 18 PRIOR ART